

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number  
**WO 2004/009742 A1**

(51) International Patent Classification<sup>7</sup>: **C10L 1/04**

(21) International Application Number:  
PCT/EP2003/007860

(22) International Filing Date: 18 July 2003 (18.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
02016092.5 19 July 2002 (19.07.2002) EP

(71) Applicant (for all designated States except US): **SHELL  
INTERNATIONALE RESEARCH MAATSCHAPPIJ  
B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR  
The Hague (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:  
— with international search report

(72) Inventor; and

(75) Inventor/Applicant (for US only): **HAASE, Frank**  
[DE/DE]; Hohe-Schaar-Strasse 36, 21107 Hamburg (DE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **USE OF A BLUE FLAME BURNER**

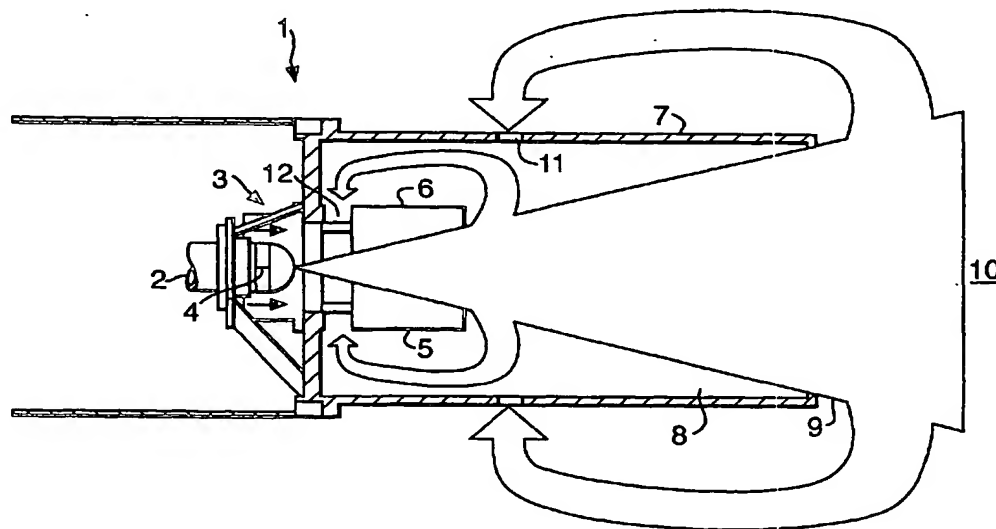

(57) Abstract: Use of a Fischer-Tropsch derived fuel in a blue flame burner. The Fischer-Tropsch fuel comprises a Fischer-Tropsch product which boils for more than 90 wt% between 160 and 370 °C, contains more than 80 wt% of iso and normal paraffins, less than 1 wt% aromatics, less than 5 ppm sulphur and less than 1 ppm nitrogen and wherein the density of the Fischer-Tropsch product is between 0.65 and 0.8 g/cm<sup>3</sup> at 15 °C.